
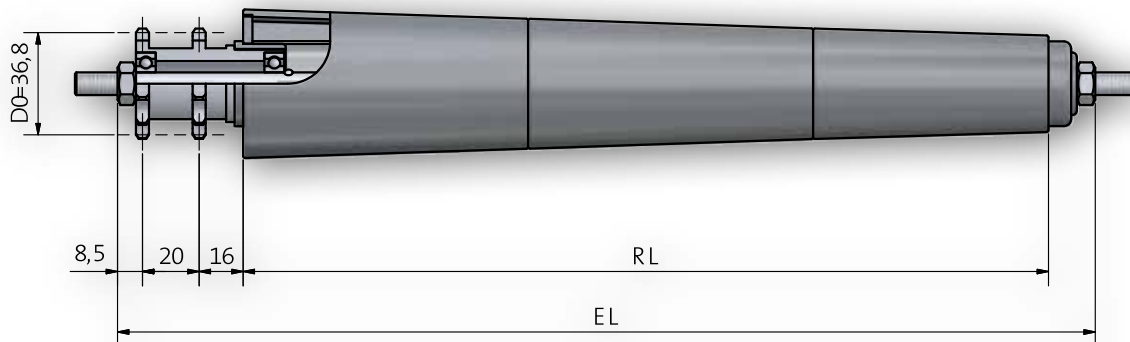



## Conveyor Roller 566 / 567



### Shaft dimensions

Order Specification		A...M...		A...FA...	
Shaft-Ø	EL=				
		Type 51	Type 60	Type 51	Type 60
8	RL+	62	55	62	55

### Range of counter bearings for tube- and shaft combinations

Tube dia.	A8
30	51 / 60

## Conveyor Roller 566 / 567

### Drive Element

Bearing Type	Steel - Double Sprocket 3/8" x 7/32" z=12
Load Capacity/Roller	Ball Bearing (Series 608) DIN 625 available in 2RS, ZZ
Max. Speed	200N (depending upon the load limit of tube and shaft)
Range of Temperature Celsius	0,5 m/s
Type of Drive	-5 to +40 C
Note	Type 566 Accumulation drive with a pressure of 5% of the loaded material weight
	Type 567 Permanent drive, driving element fit positively to the tube by a bushing
	Permanent drive only for continuous conveying.

### Order Example

Type	567 ZZ / 51B - 30x1 STI A8 M8x15 EL=438mm
Type Drive .....	
Ball bearing sealing .....	
Type of counter bearing .....	
Tube-Ø and wall thickness .....	
Tube quality .....	
Shaft-Ø .....	
Shaft ending .....	
Installation length .....	