


Roller 400 ST

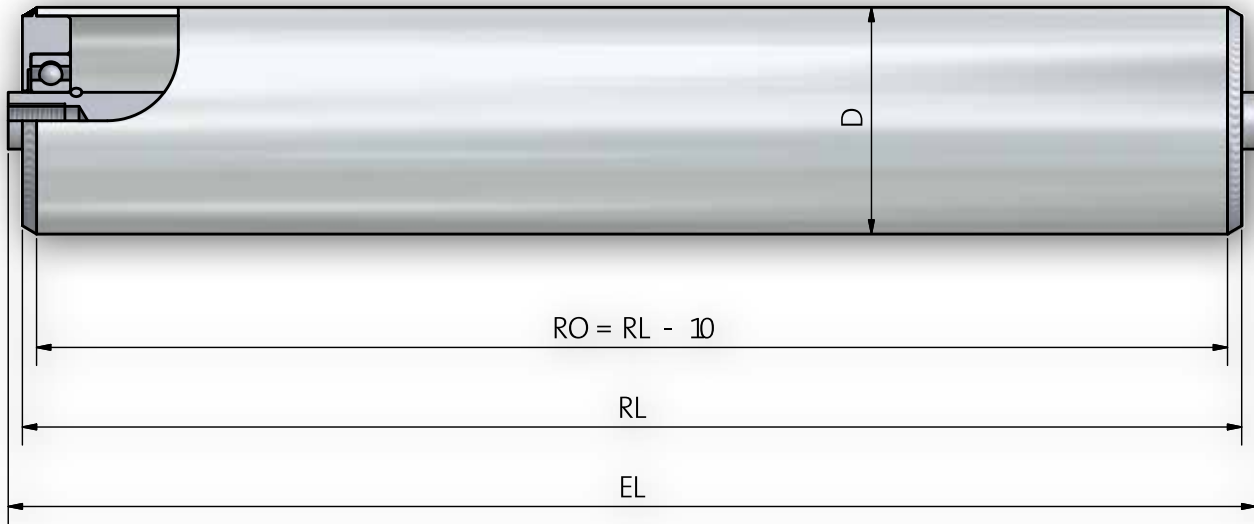

Shaft dimensions

Order Specification		A...M...	A...AGM...	A...IGM...	A...SW...
Shaft- ϕ	EL=				
20	RL+	26	6	6	6
25	RL+		6	6	6

Tube- and Shaft Combination

Tube dia.	A20	A25
63,5 x 2,9	x	x
80 x 3	x	x
88,9 x 2,9	x	x
108 x 3,25	x	x
133 x 3,6	x	x

Roller 400 ST

Bearing Type

Type of Bearing	Steel housing with Precision Ball Bearing Ball Bearing (Series 6004, 6005, 6204) DIN 625 available in 2RS, Z, ZZ
Load Capacity/Roller	(depending upon the load limit of tube and shaft)
Max. Speed	1,2 m/s
Range of Temperature Celcius	-5 to +80 C
Optional	Type 400 N made of stainless steel
Note	With special greasing even for use in Deep Freeze Areas (-28°C). Steel housing welded to the tube.

Order Example

Type	400 ST RS - 88,9x2,9 ST A20 IGM 12x20 EL=950mm
Bearing Type	
Ball bearing sealing.....	
Tube-Ø and wall thickness	
Tube quality	
Shaft-Ø	
Shaft Ends	
Installation length	